



M8 four-core connector cable for sensor testing.  
 The cable uses the inner core of silver-plated copper wire for stable transmission, and the PVC wire is durable.  
 The outer diameter of the cable is 4.5mm, and the shielding rate is 80%.  
 Application scenario: Sensor test

## Product characteristics

- Complies with IPC/WHMA-A-620 cable and harness assembly requirements and acceptance standards
- White characters on the cable : MegaSig G02.04.0014.VV.000B YYMM 4x0.14mm2 ( 26AWG)
- 100% test, product without short circuit and open condition


## Specification

Cable length Optional	Optional length: 0.7m, 1.5m, 3m, 5m, support customized length
Connection mode	Threaded connection
Temperature range	0°C~80°C
Number of plugs	≥2000
连接器型号	M8 four-core circular connector
包胶成型	Injection molding Black PVC
线缆规格	Four-core cable, 18/0.1 silver-plated copper wire + wrapped non-woven fabric + shield, inner color red, black, blue, green, OD:1.0, 16/7/0.08TC braided shield, black PVC outer cover, OD: 4.5.

## Ordering information:

Optional length	
720004-01	M8-4P-0.7, 4-core cable, 0.7 m, PVC cable
720004-02	M8-4P-1.5, 4-core cable, 1.5 m, PVC cable
720004-03	M8-4p-3, 4-core cable, 3m, PVC cable
720004-04	M8-4p-5, 4-core cable, 5 m, PVC cable
720004-05	M8-4P-X, 4-core cable, custom length, PVC cable

## Apparent dimension:

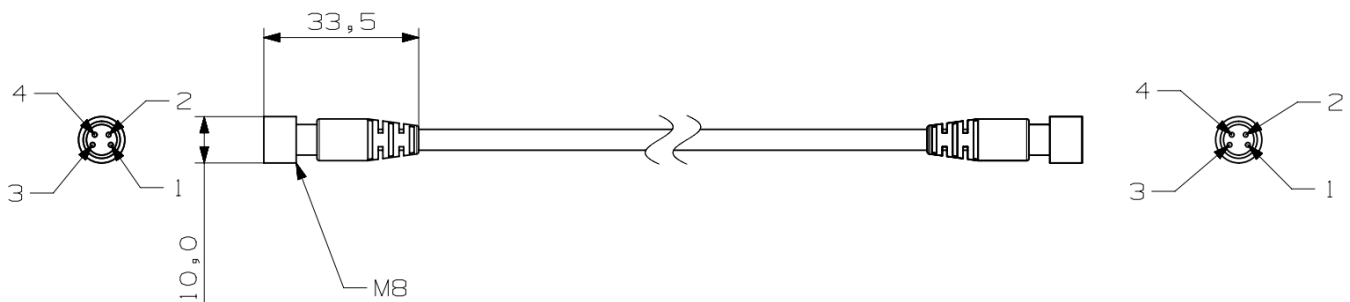

MegaSig reserves the right to change specifications and accessories without notice.



[www.megasig.com](http://www.megasig.com)

**MegaSig Measurement & Control Technology Co.,Ltd**

Tel: 0755-8950.8393

Fax: 0755-8950.8392

Sales email: [sale@megasig.com](mailto:sale@megasig.com)

Technical support email: [support@megasig.com](mailto:support@megasig.com)

Address: Room 1002, Unit 2, Building 1, Hongxing Chuangzhi Plaza,  
Guangming District, Shenzhen,China